

Open Frame LCD


Open Frame LCD

19"

Specifications




Model	R19L300-OFM2
Panel Size	19"
Active Display Area(mm)	376.3(H) x 301.6.1 (V)
Resolution	1280x1024
Contrast Ratio	2000:1 (Typical)
Display Color	16.7M
Brightness(cd/m ²)	300 (Typical)
Viewing Angle(CR>=10)	-89~89 (H) ; -89~89(V)
Standard Input Signal	1 x VGA 1 x HDMI
Input Signal (Optional)	*1x DVI *1x S-video *1x Composite
Power Input	12V DC input, with external AC to DC Adapter
Power Consumption	54W typical, Normal operation
Operating temperature	0~50°C
Storage Temperature	-10~60°C
Touch Screen (Optional)	Resistive P-cap. (Customized) SAW
Remote Control (Optional)	RS232 port
Audio (Optional)	Audio input Stereo speakers
IR Remote Controller (Optional)	13 keys controller with receiver kit
Accessories	Power Adapter VGA cable HDMI cable

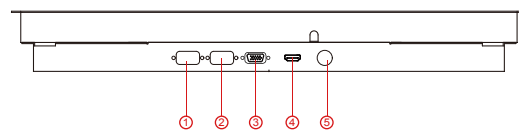

1. RS-232 for remote control (Optional)
2. RS-232/USB Touch
3. VGA
4. HDMI
5. 12V DC-in

*Outside dimension and I/O will be different from standard

Mechanical Drawing

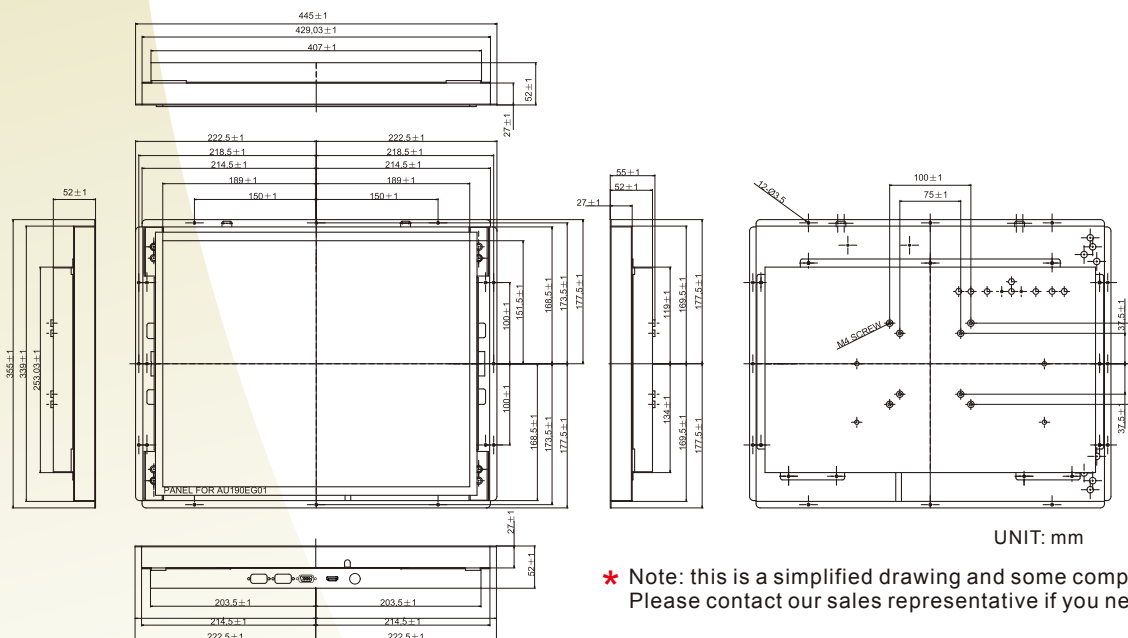

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised Date: 21-Aug-2017 V2.0